



# 80x80x25mm

- Airflow: 37.1~53.5 CFM
- Static Pressure: 4.5~6.6 mm-H<sub>2</sub>O
- Blade: Plastic Material UL 94V-0 P.B.T.
- Frame: Die-Casting Aluminum
- Weight: 138 g


Model No.	Bearing	Rated Voltage	Freq	Speed	Max. Airflow	Max. Static Pressure	Current	Power Consumption	Life at 40°C L10	P-Q Curve	Noise Level
		VAC	Hz	RPM	CFM	mm-H <sub>2</sub> O	A	W	Hour		dB(A)
GA1082LBL(F)	2B	110	50/60	2800/3200	38.6/44.1	3.9/4.4	0.11/0.13	1.90/2.40	50000	4/3	34.0/38.5
GA1082MBL(F)	2B		50/60	3200/3600	44.1/49.6	4.4/5.7	0.15/0.17	2.80/3.60	50000	3/2	38.5/42.0
GA1082HBL(F)	2B		50/60	3600/4000	49.6/55.1	5.7/6.6	0.16/0.19	3.40/4.30	50000	2/1	42.0/45.5
GA2082LBL(F)	2B	220	50/60	2800/3200	38.6/44.1	3.9/4.4	0.11/0.13	2.80/3.40	50000	4/3	34.0/38.5
GA2082MBL(F)	2B		50/60	3200/3600	44.1/49.6	4.4/5.7	0.14/0.17	3.80/4.80	50000	3/2	38.5/42.0
GA2082HBL(F)	2B		50/60	3600/4000	49.6/55.1	5.7/6.6	0.15/0.18	4.30/5.30	50000	2/1	42.0/45.5

2B: 2-ball bearing S: sleeve bearing

**Voltage Available**  
115 230

**Bearing System Available**  
2B S

### PERFORMANCE P-Q CURVE

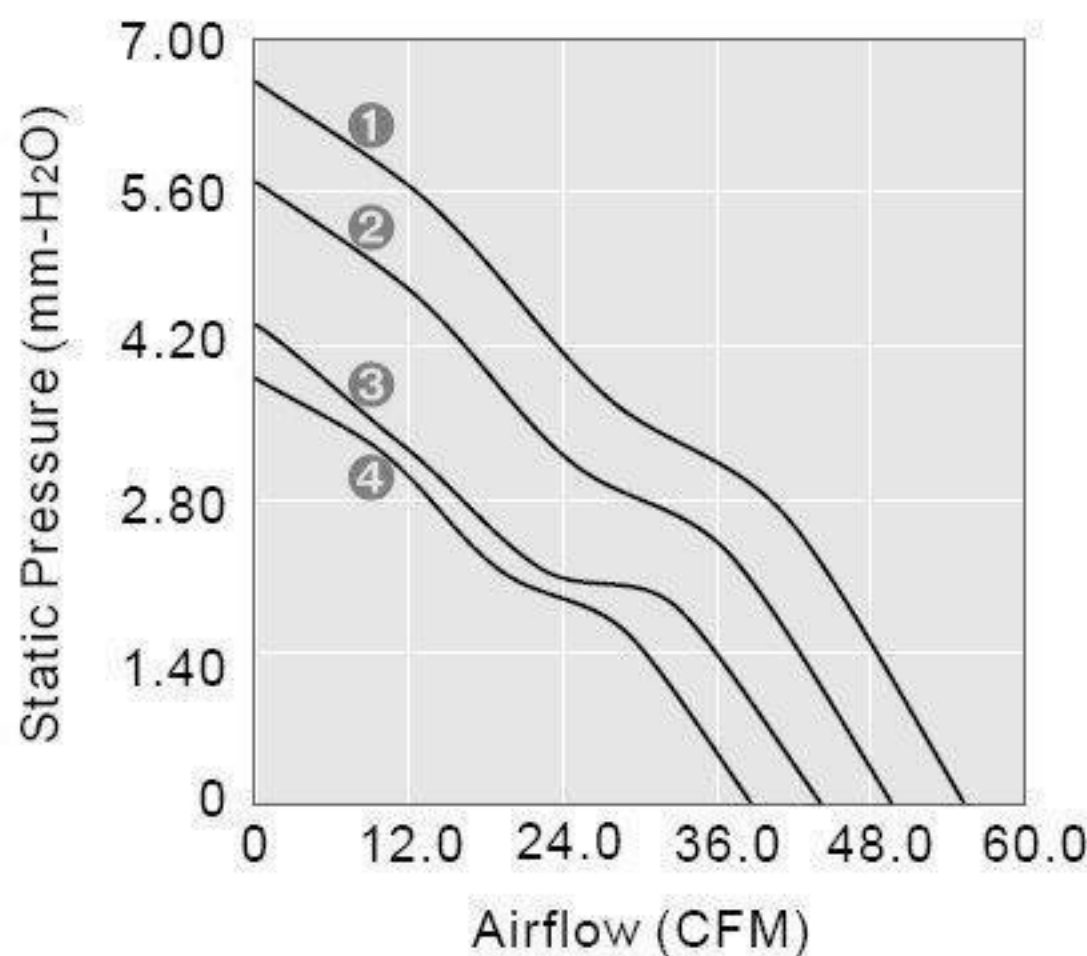

### OUTLINE DIMENSIONS

